



Inline Check Valves

CG Series Gas and Cryogenic Check Valves

Application

Inline check valves with metal seat option for cryogenic service or with soft seat option for leak free operation in gas service.

Features



- One directional flow indicated by arrow on body.
- Large Cv for high flow capability and low pressure drop.
- Working temperature range:
-320° F to +165° F for metal seats.
-20° F to +165° F for soft seats.
- 1 psig opening pressure.
- Cleaned for use in oxygen service per CGA G-4.1

Materials

Body (B and BL suffix)..... ASTM B16 Brass
 Body (SS and SSL suffix)..... 203 Stainless Steel
 Spring Stainless Steel
 Piston..... Stainless Steel
 O-Ring (soft seat option units only)..... Viton
 Metal Seat 303 Stainless Steel



CG Series

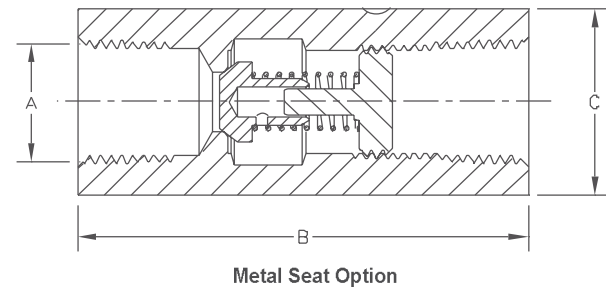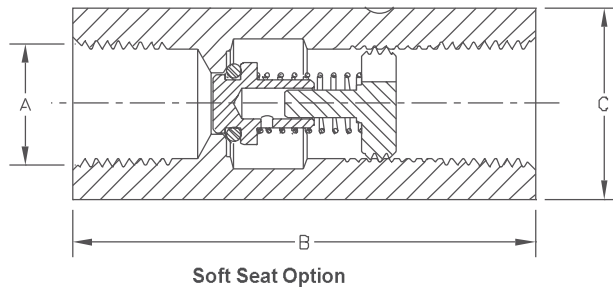

Ordering Information

Part Number	Seating Option	Inlet/Outlet Connections FNPT A	Length B	Wrenching Hex Size C	Cv	Maximum Operating Pressure
Stainless Steel Check Valves						
CG250SS	Metal	1/4"	2 3/8"	13/16"	.87	2000 psig (138 barg)
CG375SS		3/8"	2 1/2"	1"	2.3	
CG500SS		1/2"	3"	1 1/8"	3.5	
CG750SS		3/4"	3 5/8"	1 1/2"	5.2	
CG250SSL	Soft	1/4"	2 3/8"	13/16"	.87	250 psig (17.2 barg)
CG375SSL		3/8"	2 1/2"	1"	2.3	
CG500SSL		1/2"	3"	1 1/8"	3.5	
CG750SSL		3/4"	3 5/8"	1 1/2"	5.2	
Brass Body Check Valves						
CG250B	Metal	1/4"	2 3/8"	13/16"	.87	2000 psig (138 barg)
CG375B		3/8"	2 1/2"	1"	2.3	
CG500B		1/2"	3"	1 1/8"	3.5	
CG750B		3/4"	3 5/8"	1 1/2"	5.2	
CG250BL	Soft	1/4"	2 3/8"	13/16"	.87	250 psig (17.2 barg)
CG375BL		3/8"	2 1/2"	1"	2.3	
CG500BL		1/2"	3"	1 1/8"	3.5	
CG750BL		3/4"	3 5/8"	1 1/2"	5.2	